

GL-BR30 User Manual

Thanks for your choice of LED GL-BR30 series products. Please ensure that you install and use the product according to the below directions to enable the correct implementation and normal functioning of the LED product. Should you not follow these directions, you will not be compensated in accordance with the warranty. We will not take any responsibility from the improper use and implementation of the product, and for any associated damage caused by such irresponsible and negligent actions.




CAUTION

- The "Warranty Period" is three (3) years. We will warrant free repair or replacement services if the product fails or becomes defective during normal use within the prescribed warranty period. Please send back the product to our company or contact your local distributors for further directions.
- Do not change or tamper with any internal electric circuits or add in any wires or cables for any reason.
- Do not change the mechanical design, circuit specifications, or components; do not add any other devices as this may cause the product to short circuit or may create other unforeseen risks.
- Keep the lamp set in a dry environment in order to avoid any electricity leakage.
- The lifetime of the lamp is effected when used in a full enclosed fixtures. Please make sure the operating ambient temperature range is within the specified definition which is from -20°C to +40°C.
- When the LED light is in operation, the heat sink body temperature will rise to 50 ~ 60°C, the phenomenon is normal, please feel at ease to use.
- To avoid electrical shocks and possible malfunction, please do not insert objects of any nature into the LED product.
- Please do not use a dimming device, as this will cause the LED light to malfunction.
- For further information, please contact us.

- Added weight of the device may cause instability of a free-standing portable lamp. Use only with portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times minimum base width. Use only with portable table lamps which are provided with lamp shades.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.

Installation process


- Before installation, please turn off the power switch for the existing bulb.




- Please make sure that the specifications of the lamp connector and the output voltage are compatible to the LED bulb used.



- Screw in the lamp set clockwise into the lamp stand and fix lamp securely.




- Please turn on the power. If the lamp does not work, please repeat steps 1~3 until it does work.

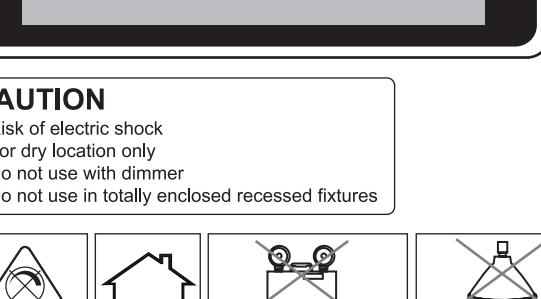

CAUTION

- Risk of electric shock
- For dry location only
- Do not use with dimmer
- Do not use in totally enclosed recessed fixtures

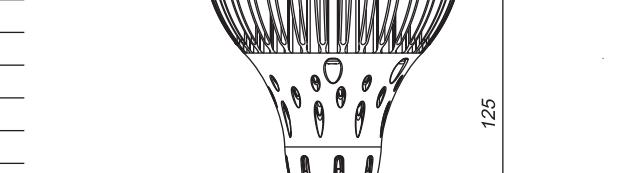

Specifications

Optical

| Model No. | GL-BR30-6WW (Warm White) | GL-BR30-6CW (Cool White) | GL-BR30-9WW (Warm White) | GL-BR30-9CW (Cool White) |
|---------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| CCT (Typical) | 3000 K | 6000 K | 3000 K | 6000 K |
| Luminous Flux (lm) | 270 lm | 360 lm | 400 lm | 540 lm |
| Typical Luminous Efficacy | 38 lm/W | 50 lm/W | 39 lm/W | 52 lm/W |
| CRI (Ra) | > 80 | > 75 | > 80 | > 75 |
| Beam Angle | 120°/60° (Option) | | | |
| Lux at 1 M (120°) | 104 lux | 137 lux | 143 lux | 176 lux |
| Lux at 1 M (60°) | 184 lux | 245 lux | 295 lux | 329 lux |

Mechanical and Dimension

| | |
|--------------|----------------------------------|
| Outline Dim. | $\varnothing 98 \times 125$ (mm) |
| Net. Weight | 0.25 (Kgs) |
| Socket Base | E26; E27 |
| Cover | Clear/ Frosted |



Electrical

| | |
|---------------------------|---|
| Typical Power Consumption | 7.2 W for GL-BR30-6; 10.4 W for GL-BR30-9 |
| Power Factor | > 0.9 for 115V AC; > 0.8 for 230V AC |
| Input Voltage | 100 – 240V AC |

Temperature Condition

| | |
|-----------------------|----------------|
| Operating Temperature | -20°C to +40°C |
| Storage Temperature | -40°C to +85°C |

BR30 Series Outlook

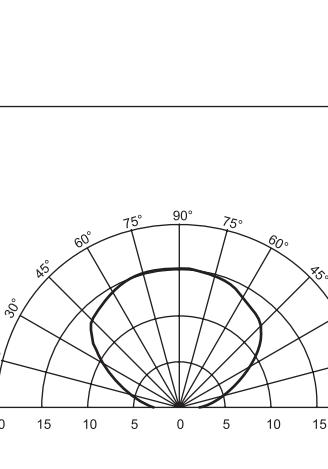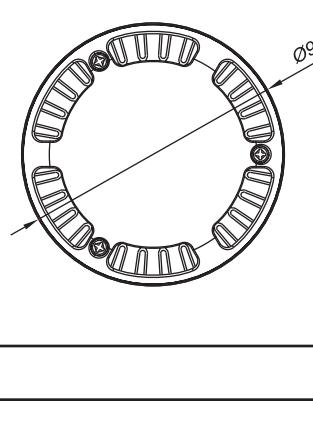

Candle Power Distribution Curve (6 W / 3 M)

